

NT 75/1 ME EC M Z22

La aspiradora NT 75/1 Me Ec M Z22 de clase de polvo M está certificada según la directiva ATEX 2014/34/UE (instituto de pruebas IBExU) para su uso en zonas potencialmente explosivas designadas como zona 22.



Ref. de pedido **1.667-332.0**

- Certificado para la zona 22 según lo definido por la Directiva ATEX 2014/34/UE.
- Motor EC sin escobillas con una vida útil de 5000 horas.
- Aspirador de seguridad de clase de polvo M.

Datos técnicos		
Tipo de corriente	V/Hz	220 - 240 / 50 - 60
Caudal de aire	l/s	61
Vacío	mbar/kPa	220 / 22
Capacidad del depósito	l	75
Capacidad de absorción	W	max. 1000
Ancho nominal estándar	ID 40	
Nivel de presión acústica	dB(A)	76
Color		Plata
Peso sin accesorios	Kg	24,1
Peso con embalaje incluido	Kg	31,9
Dimensiones (largo x ancho x alto)	mm	695 x 540 x 1012

Equipamiento		
Bolsa de filtro de seguridad	Piezas	1
Manguera de succión	m	4 / con curvatura (conductor eléctrico)
Tubo de succión	Piezas/mm/material	2 / 550 / Inoxidable
Bolsa de filtro		Lana
Boquilla para suelos	mm	360
Boquilla para rincones		■
Sistema antiestático		■
Contenedor de acero inoxidable		■
Filtro plisado plano		Fibra de vidrio
Curva de metal		■
Empuñadura		■
Clase de protección		L
Rueda giratoria con freno		■
Clase de polvo		M
Material de contenedor		Acero inoxidable

■ Incluido




Certificado para la zona 22 según lo definido por la Directiva ATEX 2014/34/UE (instituto de pruebas IBExU)

- Máximo nivel de seguridad para el usuario en zonas potencialmente explosivas de la zona 22.
- Apto para eliminar polvo de clase M.



Motor CE sin escobillas

- Alta resistencia al desgaste y larga vida útil (5000 horas).

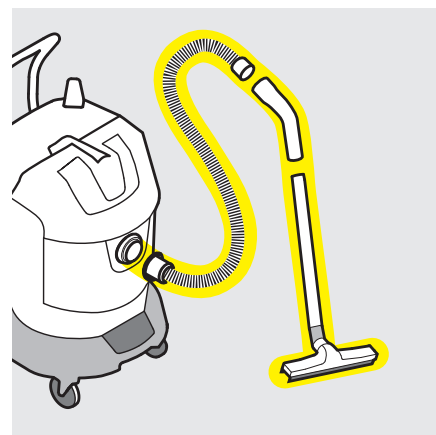

Sistema antiestático

- Sistema antiestático continuo con accesorios eléctricamente conductores.

ACCESSORIES FOR NT 75/1 ME EC M Z22

1.667-332.0



1



10



11

		Order no.	Description	
FLAT PLEATED FILTER, STANDARD, BIA C OR UP TO DUST CLASS M				
Flat pleated filter, PES				
Wet & Dry flat pleated filter	1	6.907-662.0	Wet & Dry flat pleated filter made from PES fibre material with a blue label. Suitable for vacuuming liquids, fine dust and coarse dirt from the M and L dust classes.	■
BENDS				
Bend, plastic				
Bend, NT, DN 40, plastic, electrically conductive, clip 2.0 at hose end, cone at accessory end, certified for Zone 22	2	2.889-366.0	Electrically conductive DN 40 plastic bend. With clip 2.0 and cone connection and certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	■
SUCTION NOZZLES				
Floor nozzles				
Wet/dry floor nozzle, plastic, DN 40, width 360 mm, certified for zone 22	3	2.889-369.0	Floor nozzle made of plastic with nominal width DN 40 and 360 mm width. It is certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	■
Wet/dry floor nozzle, aluminium, DN 40, width 450 mm, certified for Zone 22	4	2.889-390.0	Aluminium floor nozzle in DN 40 with 450 mm working width. It is certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	□
Crevice nozzles				
Crevice nozzle, NT, DN 40, plastic, length 300 mm, certified for Zone 22	5	2.889-368.0	For vacuuming in joints and corners: plastic crevice nozzle in nominal width DN 40 and 300 mm length. Certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	■
All-purpose brushes				
Multi-purpose brush, DN 35, certified for Zone 22	6	2.889-411.0	Multi-purpose brush in DN 35 for gentle suction of surfaces and certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners. Reduction bushing is required.	□
SUCTION TUBES				
Suction tubes, stainless steel				
Suction tube, 2x, DN 40, 550 mm long, stainless steel, certified for Zone 22	7	2.889-367.0	Kärcher suction tube set with 2 stainless steel suction pipes in nominal width DN 40 and with 550 mm length. The set is certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	■
SUCTION HOSES				
Suction hoses zone 22				
Suction hose, NT, DN 40, length 4 m, electrically conductive, clip 2.0, bayonet 2.0, certified for Zone 22	8	2.889-364.0	Electrically conductive suction hose with 4 m length and nominal diameter DN 40. Certified for cleaning applications with Zone 22 explosion-proof wet and dry vacuum cleaners.	■
Suction hose, NT, DN 40, length 8 m, electrically conductive, clip 2.0, bayonet 2.0, certified for Zone 22	9	2.889-365.0	Electrically conductive suction hose in nominal width DN 40 for cleaning applications with Zone 22 explosion-proof wet and dry vacuum cleaners. The hose is 8 m long.	□
FILTER BAGS				
Fleece filter bags				
Fleece filter bags, 5 x , NT 65, NT 70, NT 72, NT 75, NT 90	10	2.885-753.0	Tear-resistant fleece filter bags of dust class M, suitable for Kärcher wet and dry vacuum cleaners. Contents: 5-pack.	□
FILTER T/ NT				
Fabric filter				
Candle filter Wood, NT 30/1, NT 40/1, NT 50/1	11	2.414-000.0	Wood cartridge filter made from textile material with PTFE coating and a brown label. For safely vacuuming large quantities of wood and fibre dust from dust classes M and L.	□
CONNECTING SLEEVES				
Reducing sleeves				
Reduction bushing from DN 40 to DN 35, certified for zone 22	12	2.889-410.0	Reduction bushing for using the multi-purpose brush (DN 35) with bend and suction tube in DN 40. It is certified for use with Zone 22 explosion-proof wet and dry vacuum cleaners.	□

■ Included in the scope of supply. □ Available accessories.